



MDU-40-ECO

General Specifications:

Server Capacity : 336


Dimensions : (L)12192mm x (H)2896mm x (W)2880mm
(40"ft) x (9.5"ft) x (9.44"ft)

Racking : 4 racks x 7 shelves

Lighting : 5x 4000K White LEDs

Door : 1x Commercial door with panic bar

Flooring : Grey epoxy

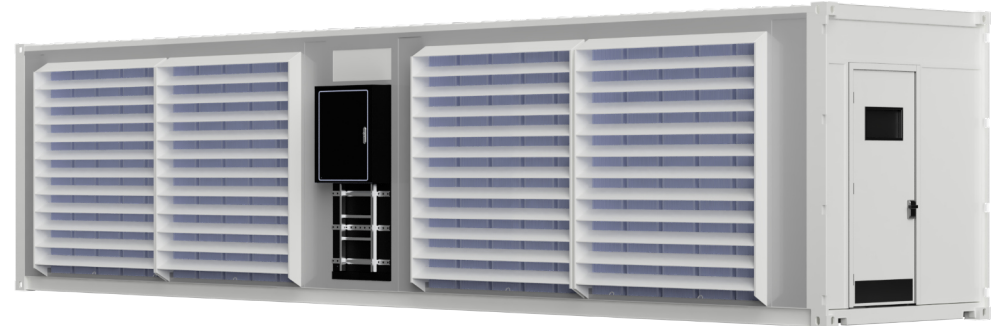

Electrical System:

Power input : 3 Phase 380V-480V, 60hz (3PH +N+GND)

Power Distribution Cabinet : ELC-S2000-V1

Main Breaker : 1x 2000A ACB (UL489) with 0.4 - 1 trip setting adjustment

Distribution Breaker : 3X 630A MCB (UL489) with 0.7-1 trip setting adjustment

PDU Distribution Wiring : UL Type W 5C 4/AWG Copper

PDU Breaker : 28x 100A 3P 12 port P34 (ETL Listed)

Power Metering : Included on PDC

Thermal Controls : Included on PDC


Cooling System:

Intake System : Laminar Ducting System

Filters : Polyester Box

Exhaust : Laminar Shelf Ducting

Hot Aisle Seal : 28x Configurable 16G steel panels
(Request Model Type)

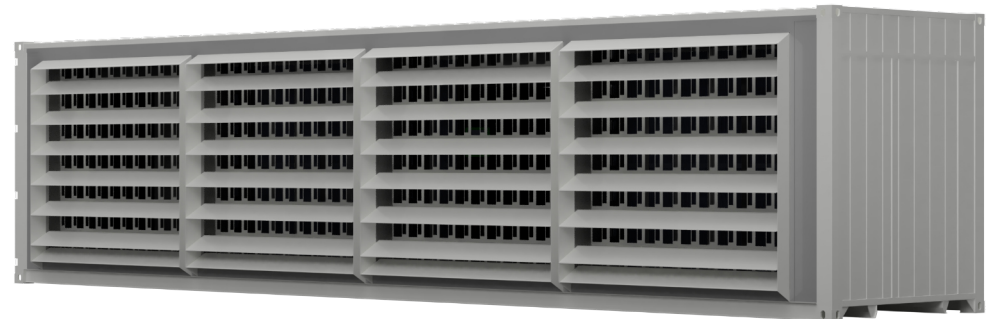

Network System:

Network Switch : 18x 10/100 TP Link unmanaged 24 port

Network Cable : 342x Booted Cat6 Cables

Contact @andreykechik on Telegram or akechik@gogotech.org